


## ASTROhead Cam

Multi-purpose camera with radiation hard design

**This compact and lightweight space camera for the visible range was designed from Jena-Optronik's heritage from the successful ASTRO star sensor series.**

**While adopting new, state-of-the-art APS detector chip technology to reduce size and weight, maximum use was made of heritage technology. This guarantees durability, reliability, performance, and affordability of this versatile camera right from the start.**



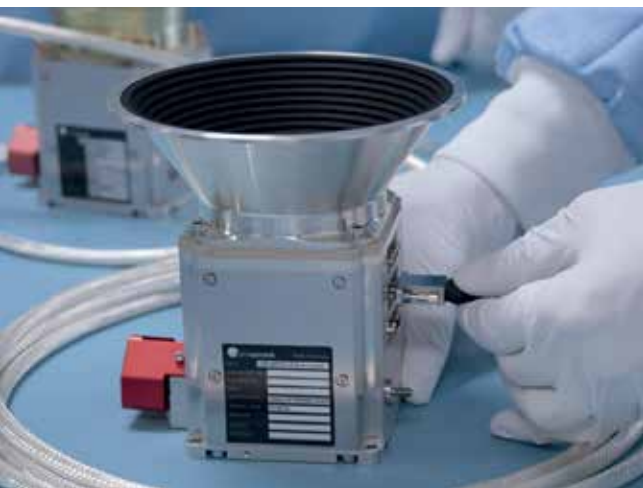


## ASTROhead Cam

Visible range camera with grayscale image output

Data output		
	Full frame images	up to 4Hz (up to 8 Hz on request)
	ROIs / windows	frame rate depends on the ROI/window size
Specification		
Detector	FaintStar	APS CMOS technology
Detector Resolution	1024 x 1024 pixels	
Optics	<ol style="list-style-type: none"> <li>refractive, focal length 30.5mm, f/1.3</li> <li>refractive, focal length 8.4 mm, f/8.0 option</li> <li>refractive, focal length 106 mm, f/4.2 option</li> </ol> Further optics /FoVs available on request	rad-hard glass material 19.5° circular rad-hard glass material 68° circular rad-hard glass material 5.5° x 5.5° rectangular
Mass	ASTROhead 26 deg SEA baffle 85 deg SEA baffle	approx. 0,9 kg approx. 0,2 kg approx. 0,1 kg
Dimension	80 x 80 x 88 mm <sup>3</sup>	without baffle, excluding alignment cube
Operational I/F	SpaceWire	Either connection to S/C or multiple Optical heads can be connected to the controller (see below)
Power I/F	28 V (5 V on request)	Either connection to S/C or multiple Optical heads can be connected to the controller (see below)
Power consumption	0,9 W typical	
Reliability	215 FIT @+35°C	MIL-STD-217-F2
Temperature range		
Operational	-30 °C ... +60 °C	
Non-operational	-40 °C ... +70 °C	

## Controller

Multiple optical heads connect to the redundant controller box

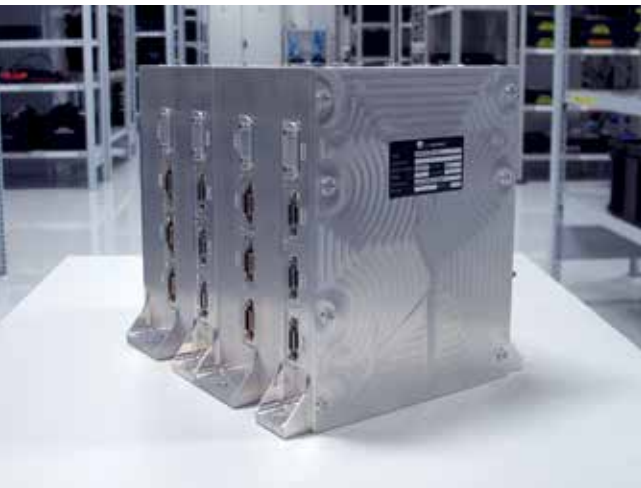

Data output		
Star Sensing	Attitude calculation from star centroids Data fusion from multiple optical heads Acquisition support between multiple heads	
Navigation Space Situational Awareness	Delivery of synchronized images from multiple optical heads Stereo imaging and 3D coordinate output Pose estimation and 3D output	optional optional
Inspection	Storage and output of multiple images	
Specification		
Dimension	194 x 172 x 181 mm <sup>3</sup>	Fully redundant
Mass	approx. 5,4 kg	Fully redundant
Data (external)	SpaceWire	Other I/F available on request
Data (internal)	SpaceWire for data exchange between ASTROheads and controller	connection of up to 3 ASTROheads per controller (fully redundant), optional more units with additional SpaceWire Router
Power I/F	28 V nominal	Input voltage range can be tailored to customer needs
Power consumption	13 W typical	end of life, with 3 ASTROheads, cold redundancy
Temperature range		
Operational	-30 °C ... +60 °C	no active cooling included
Non-operational	-40 °C ... +70 °C	



Hera and Dimorphos (artist's impression) © OHB

## ASTROhead Cam

Optical head for visible range space imaging applications

### ASTROhead is useable as visible range camera for

- Navigation
- Inspection
- Orientation
- Space Situational Awareness

### ASTROhead delivers

- Full frame images, compressed or uncompressed
- ROIs / windows

### ASTROhead stand-alone version available

- Camera S/W libraries available to run on S/C on-board computer
- Star identification software libraries based on ASTRO star tracker heritage available to run on S/C on-board computer to allow star sensing based on the ASTROhead image output

### Fully redundant controller box available connecting up to four ASTROhead

- S/W for delivering synchronized full frame images available for later stereo processing
- Multiple ASTROheads connecting to a dedicated controller box makes it a fully autonomous star tracker system with data fusion and acquisition support between the different optical heads

### ASTROhead highlights

- Radiation hard design for > 18 years GEO life time
- Lightweight: < 1 kg w/o baffle
- Space qualified heritage optics design for 19deg and 68deg field of view available, further designs upon request
- Compact size
- Low power consumption